— Instruction Manual ——

BA165/BA245







Customer Service (800) 247-7668

Item	Qty	Description	Item	Qty	Description
A	2	Cart End	F	4	Caster
В	1	Lock Plate	G	12	Horizontal Bar (packaged separately)
С	1	3/8 X 2 Hex Bolt	Н	24	1/2" Button Head Cap Screw
D	1	Nylon Spacer	I	1	5/16" Allen Wrench
Е	1	3/8" Lock Nut			

- Inspect all contents prior to installation. Report any missing parts to dealer immediately.
- Read all instructions before proceeding.
- 1. Assemble Lock Plate (B) to Cart End (A) using a 3/8" X 2" Hex Bolt (C) through the center hole, the Nylon Spacer (D) between the Lock Plate (B) and the Cart End (A), and a 3/8" Lock Nut (E). Tighten so the Lock Plate (B) can rotate easily but with some resistance so it stays in position when rotated. See Figure 1.
- 2. Assemble Cart Sides (A) to Horizontal Bars (B) using the 5/16" Allen Wrench (I) and 1/2" Button Head Cap Screws (H). See Figure 2.
- 3. Install *Casters* (F) into the bottom of *Cart Sides* (A). See Figure 2.



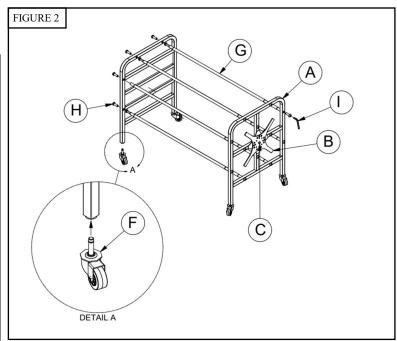

Date: 3/30/23 Rev: 7 N.J.C. File: \pub\ba165inst Ref#: 950393 L.M.