




SCOREBOARD SPECIFICATIONS FOR

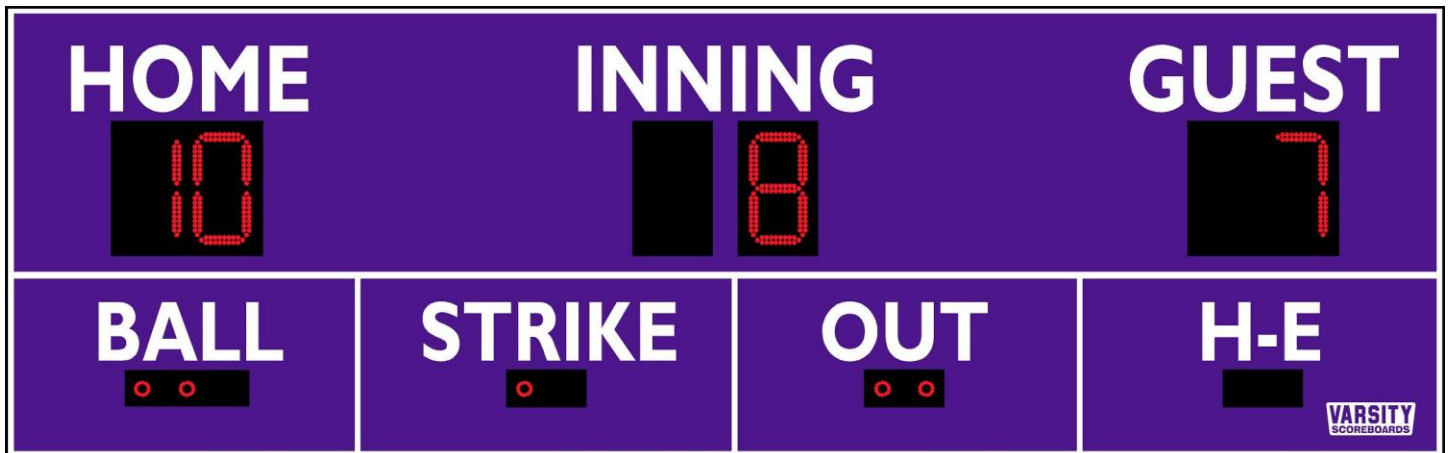

MODEL VSBX-385 5X16

www.varsityscoreboards.com

VARSITY SCOREBOARDS
106 Max Hurt Drive
Murray, KY 42071

Phone: 1-866-575-0577 Fax: 270-759-0004



SCOREBOARD SPECIFICATIONS

MODEL VSBX-385

Lead your league with this Baseball/Softball scoreboard! Large 15" high super-bright 100,000-hour rated LED numerals are the largest with the widest viewing angle in the industry and are visible over 300 feet. The 22-gauge galvanized steel cabinet with powder-coat finish means your scoreboard is the most durable on the market and will look brand new for many years! Scoreboard package includes: operator's keyboard, digit protective shields, junction box cover (cable models only), mounting rails and a complete operation, installation, service manual and warranty details are included on the CD shipped with each scoreboard.

OVERALL DIMENSIONS

5.0' tall x 16.0' wide x 8.0" depth

WEIGHT

Hanging weight: 495 lbs.
Shipping weight: 625 lbs.

CONSTRUCTION

22-gauge galvanized steel cabinet with powder coat finish for strength, durability, and lasting appearance

POWER REQUIREMENTS

Scoreboard:

(1) 20-amp, 120-volt, 60-hertz, grounded AC circuit connected to an ON/OFF switch and/or circuit breaker

Controller:

Standard hand held controller

SCORING INFORMATION DISPLAYED

HOME: 2-digit displays, 0-99

GUEST: 2-digit display, 0-99

INNING: 2-digit display, 0-99

BALL: 3-2.0" dot displays

STRIKE: 2-2.0" dot displays

OUT: 2 -2.0" dot displays

HIT and ERROR: 2 -2.0" dot displays

CAPTIONS

HOME, GUEST and INNING: 9.0" tall

BALL, STRIKE and OUT: 8.0" tall

HIT and ERROR: 8.0" tall

Polymeric Calendered Vinyl Lettering

HOME, GUEST and INNING

15.0" tall, 160° visibility, red, 100,000 hour-rated, outdoor Super-Bright LED (light emitting diode) displays
Impact Resistant Acrylic Protective Digit Shields and Adjustable LED Intensity Included

BALL, STRIKE, OUT, HIT and ERROR Displays

2.0" dot displays, 160° visibility, red, 100,000 hour-rated, outdoor Super-Bright LED (light emitting diode) displays
Impact Resistant Acrylic Protective Digit Shields and Adjustable LED Intensity Included

APPROVALS

ETL/CSA listed

Scoreboard: Meets all FCC Class A requirements

900MHz wireless transmitter: FCC Part 15 certified

900MHz wireless receiver: Meets all FCC Part 15 requirements

WARRANTY

This product is warranted against defects in materials and workmanship for the period specified in the warranty from the date of invoice. The complete warranty details are included on the CD shipped with each unit.

SERVICE

Technical Support is available 24 hours a day, 7 days a week @ 1-800-411-3136

INSTALLATION

This model may be installed between (2) 8" OD steel, schedule 40 poles; or (2) 8" I-beams (W8X 31), minimum. Hole depth /diameter as well as pole/concrete specifications must be based on customer's local building codes, soil conditions, and wind loads. Mounting rails are supplied.

Support structure and mounting hardware supplied by installer/others

SCOREBOARD CONTROLLER

Dimensions: 2-1/4" X 1-1/4" tapered height x 6.0" width x 7.0" depth. **Weight:** 1lb.

The hand held controller available with this scoreboard is microprocessor-controlled, molded of high-impact ABS plastic, has a tactile membrane keypad. Options include 900 MHz wireless control and internal battery pack.


Cable-Controlled System (standard) Includes:


- (1) Hand held controller
- (1) BASEBALL/SOFTBALL keypad insert
- (1) Junction box cover with receptacle (to be installed at scorekeeper's location)
- (1) 20-ft. signal cable (used to connect the keyboard to the junction box receptacle)
- (1) Project-specific length of 4 wire twisted pair, shielded control cable

900MHz Wireless built into hand held controller (optional) Includes:


- (1) Hand held controller (internal battery pack – 4 AA batteries)
- (1) BASEBALL/SOFTBALL keypad insert

Scoreboard Dimensions:
5.0' tall x 16.0' wide x 8.0" depth

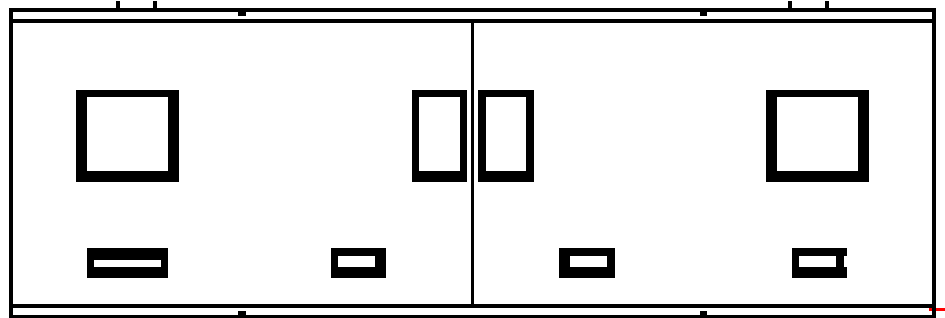

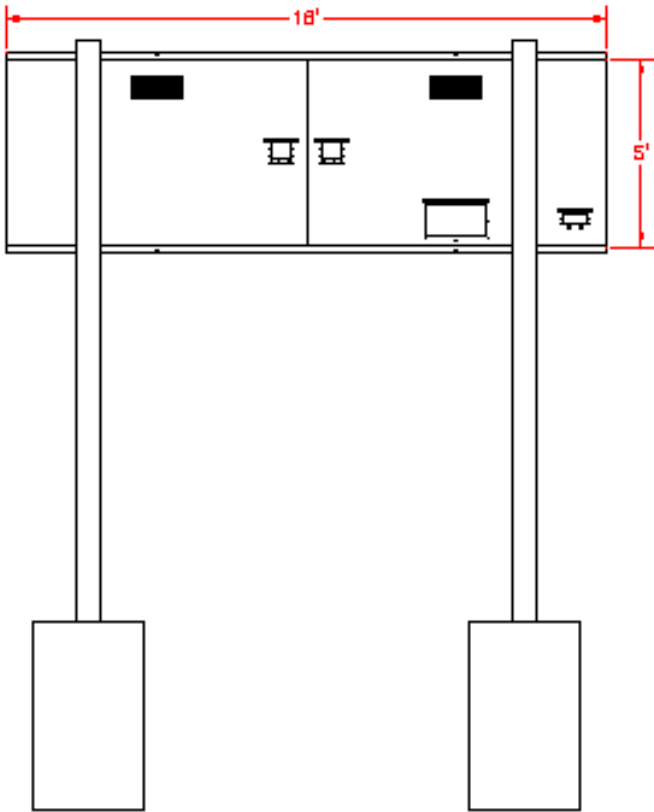

Rear View: Mounted

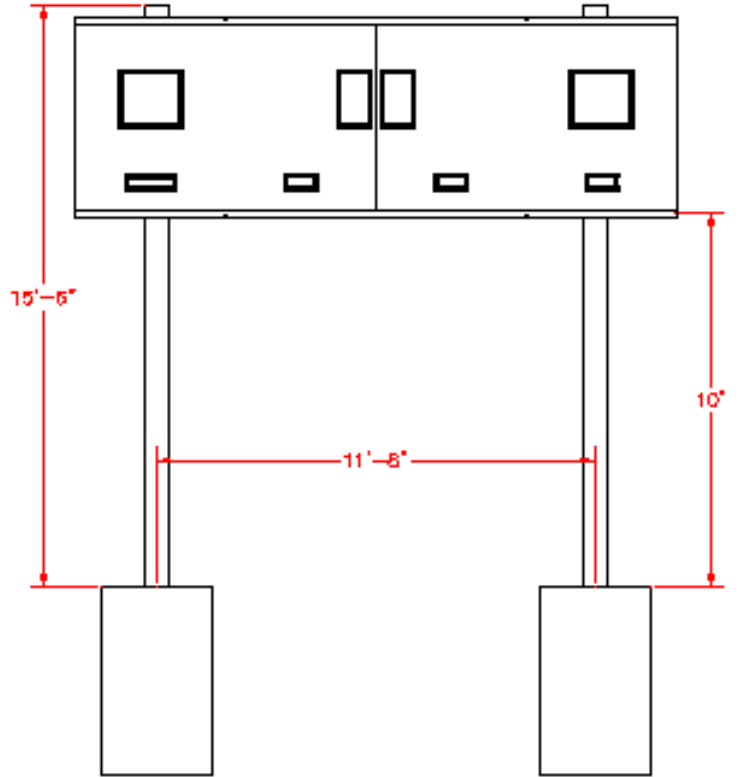

Front View: Mounted